

SKYLIGHT COATING

Premium Rubber Coating for Fiberglass Skylight Panels.


CR-2100 Rubber Skylight Coating: A proprietary chemical formula with built-in strength and water resistance for extremely effective protection for fiberglass skylight panels. CR-2100 is a one component, clear rubber coating that has excellent adhesion to properly prepared surfaces and is thermally stable and resists cracking and peeling due to weather extremes and ultraviolet exposure.

TECHNICAL DATA:

| | |
|---------------------------|-------------------------|
| Color | Clear |
| Coverage Rate..... | 80-100 sf/gal |
| Wet Mil Thickness | 10 - 12 mils |
| Dry Mil Thickness..... | 4 – 5 mils |
| Flashpoint | 101°F |
| Specific Gravity | 864 |
| Weight (lb./gal.)..... | 7.2 |
| Solids (% by Weight)..... | 37.1 ±1% |
| Viscosity @ 78° | 1500 cps. |
| Drying Time..... | 1-3 hours |
| Elongation..... | ASTM-D-412...400% |
| Tensile Strength..... | ASTM-D-412...1520 PSI |
| Permeance (10 mils)..... | ASTM-E-96...0.166 perms |



CR-2100 APPLICATION

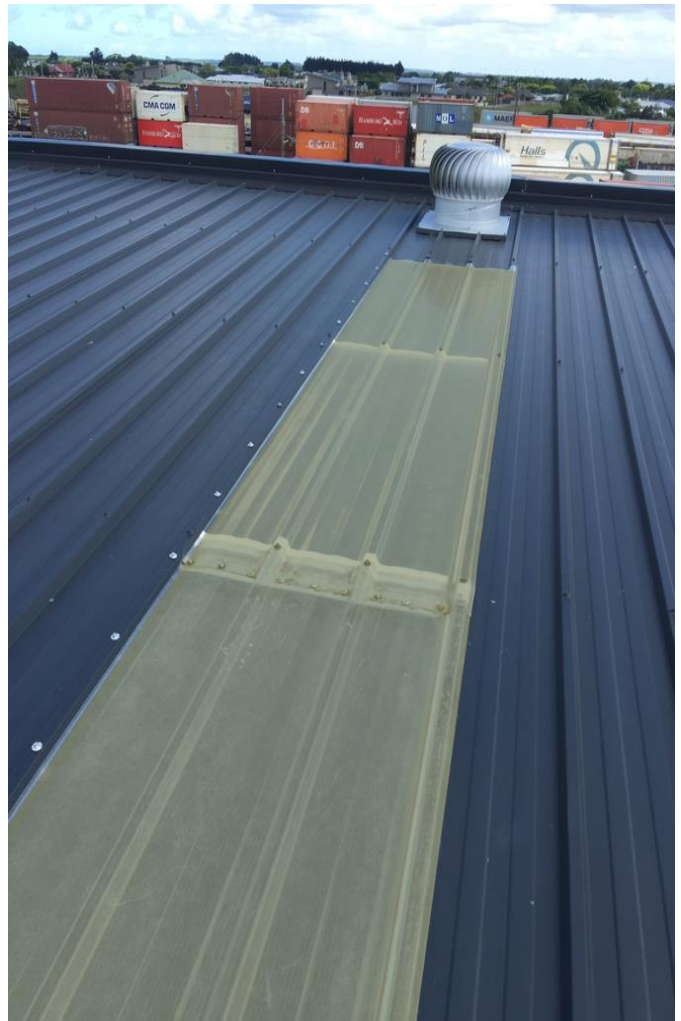

CR-2100 & SAFETY YELLOW



Skylight Coatings & Safety Yellow:

Inland's CR-2100 and Safety yellow is perfect for restoring & outlining skylights. Inland's Safety Yellow is specifically engineered as a single component product with adhesion promoters and primer built in for exceptional visibility, superior durability and excellent wear resistance to use on industrial applications.

Use our **RC-2050 SAFETY YELLOW** to outline hazardous areas, skylights, mezzanines & walkways as well as cautionary areas in the workplace.

