

SPECIFICATIONS

105°F

FLASH POINT

7.5lbs

WEIGHT/GALLON

5%

% SOLIDS

Clear

COLOR

12 hours

DRYING TIME @ 77°F

Very Thin

VISCOSITY

50°F

APPLICATION TEMPERATURE

150ft²/gal

COVERAGE:
ROUGH SURFACE

300ft²/gal

COVERAGE:
SMOOTH SURFACE

CR 2150

Waterproof Sealer 5% Silicone

CR 2150 is a thin liquid of high penetrating nature with active thinners that carry the chemicals. It will seal and waterproof unpainted brick, stone, stucco, masonry, cement block & wood surfaces without changing the appearance of such buildings.



Silicone Durability - Cured silicone rubber exhibits excellent long-term resistance to natural weathering including extreme temperatures, ultraviolet radiation, rain & snow

Versatile Application – Single component material that requires no mixing and can be applied with airless equipment, roller or brush

High Build Formulation – Allows for single coat application and hangs on peaks without sagging

Storage & Shelf Life – Can be stored in unheated warehouses during cooler months without risk of freezing.

APPLICATIONS

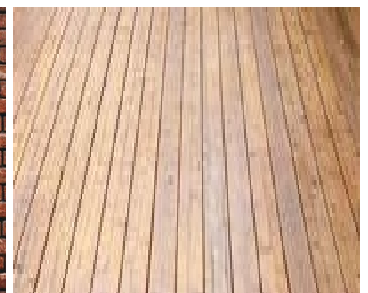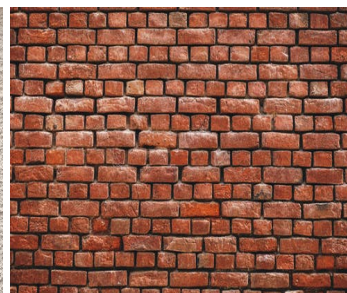

Inland Coatings
26259 US-6
Adel, IA 50003

Phone: 800. 456. 8467
Email: info@inlandcoatings.com
Website: inlandcoatings.com